


Environex

International



Top Deck Transformations Oil

Highlights and Protects Natural Timber Decks

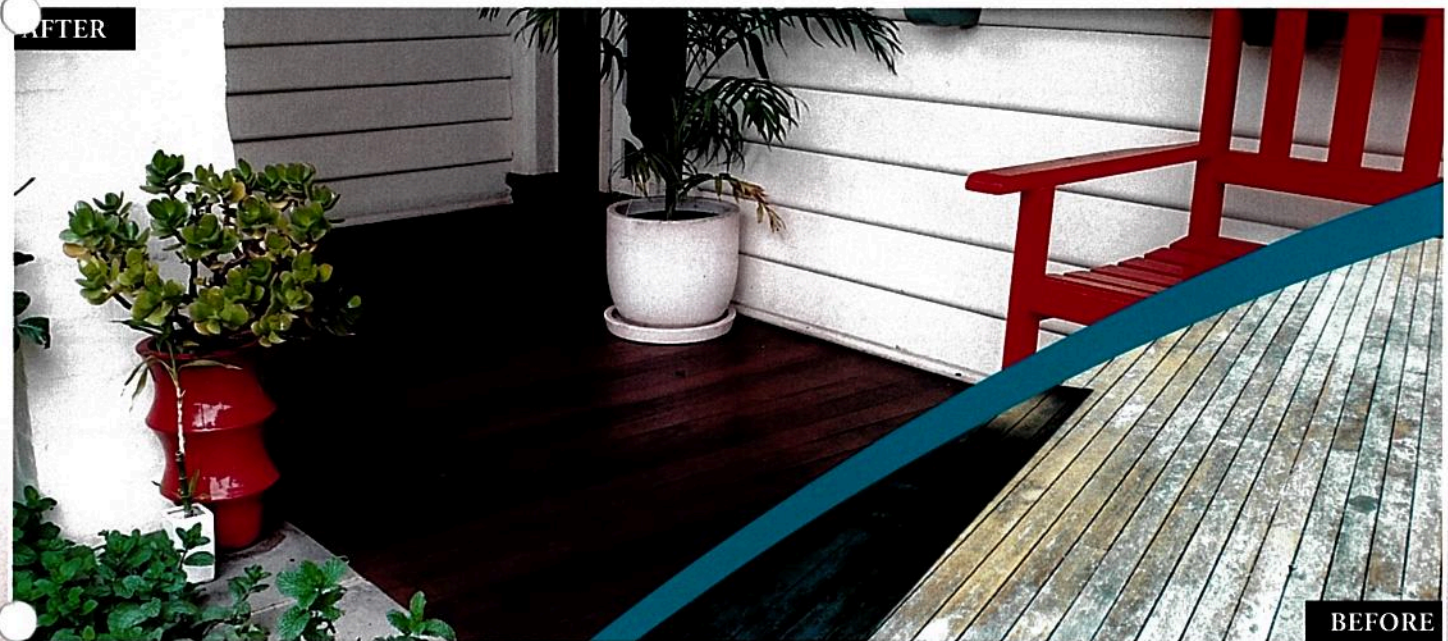

TOP DECK TRANSFORMATIONS OIL is designed to enhance, protect and darken the natural beauty of the timber deck.

- Do not seal under 10°C or over 30°C or if relative humidity is above 85%.
- Always wear Personal Protective Equipment (PPE) – A minimum requirement of Safety Glasses, Mask, Gloves & Boots. Damage to clothing may occur.
- New Decks: Lightly sand, vacuum the surface clean or use a microfibre mop to ensure the surface is clean and dry from any contamination.
- Existing Decks: Clean greasy residue with **S21 MPC** or **MAESTRO** for moss and mould removal. After cleaning the deck, please follow the "New Deck" sanding and sealing process.
- Stir well with flat timber or metal paddle. Apply 2-3 thin coats of **TOP DECK TRANSFORMATIONS OIL** to a clean dry surface with an **ENVIRONEX LAMBSWOOL APPLICATOR**, paint brush or short nap roller. First coat can be thinned 5-10% with Mineral Turps. Lightly sand and vacuum between coats.
- Do not apply to wet or green timber.
- Coverage approximately 8-10m² per Litre per coat.
- Only use **REFRESH** pH neutral detergent for daily or weekly maintenance.
- Always test first.



Technical Assistance 1800 999 196
www.environex.net.au

The Next Generation in Specialty Formulators

